


Tytus




TERMA
SINCE 1990

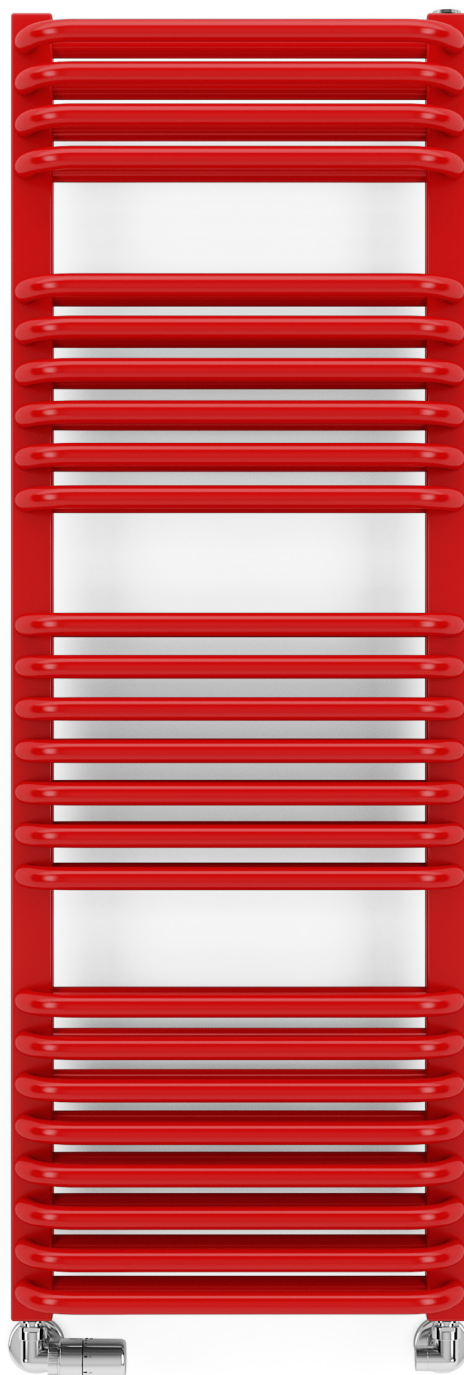


Tytus 1260↓ × 440↔ SX
colour: RAL 3020

3-axis thermostatic valve set, left, chrome
Integrated pipe-masking set, chrome




TERMA
SINCE 1990

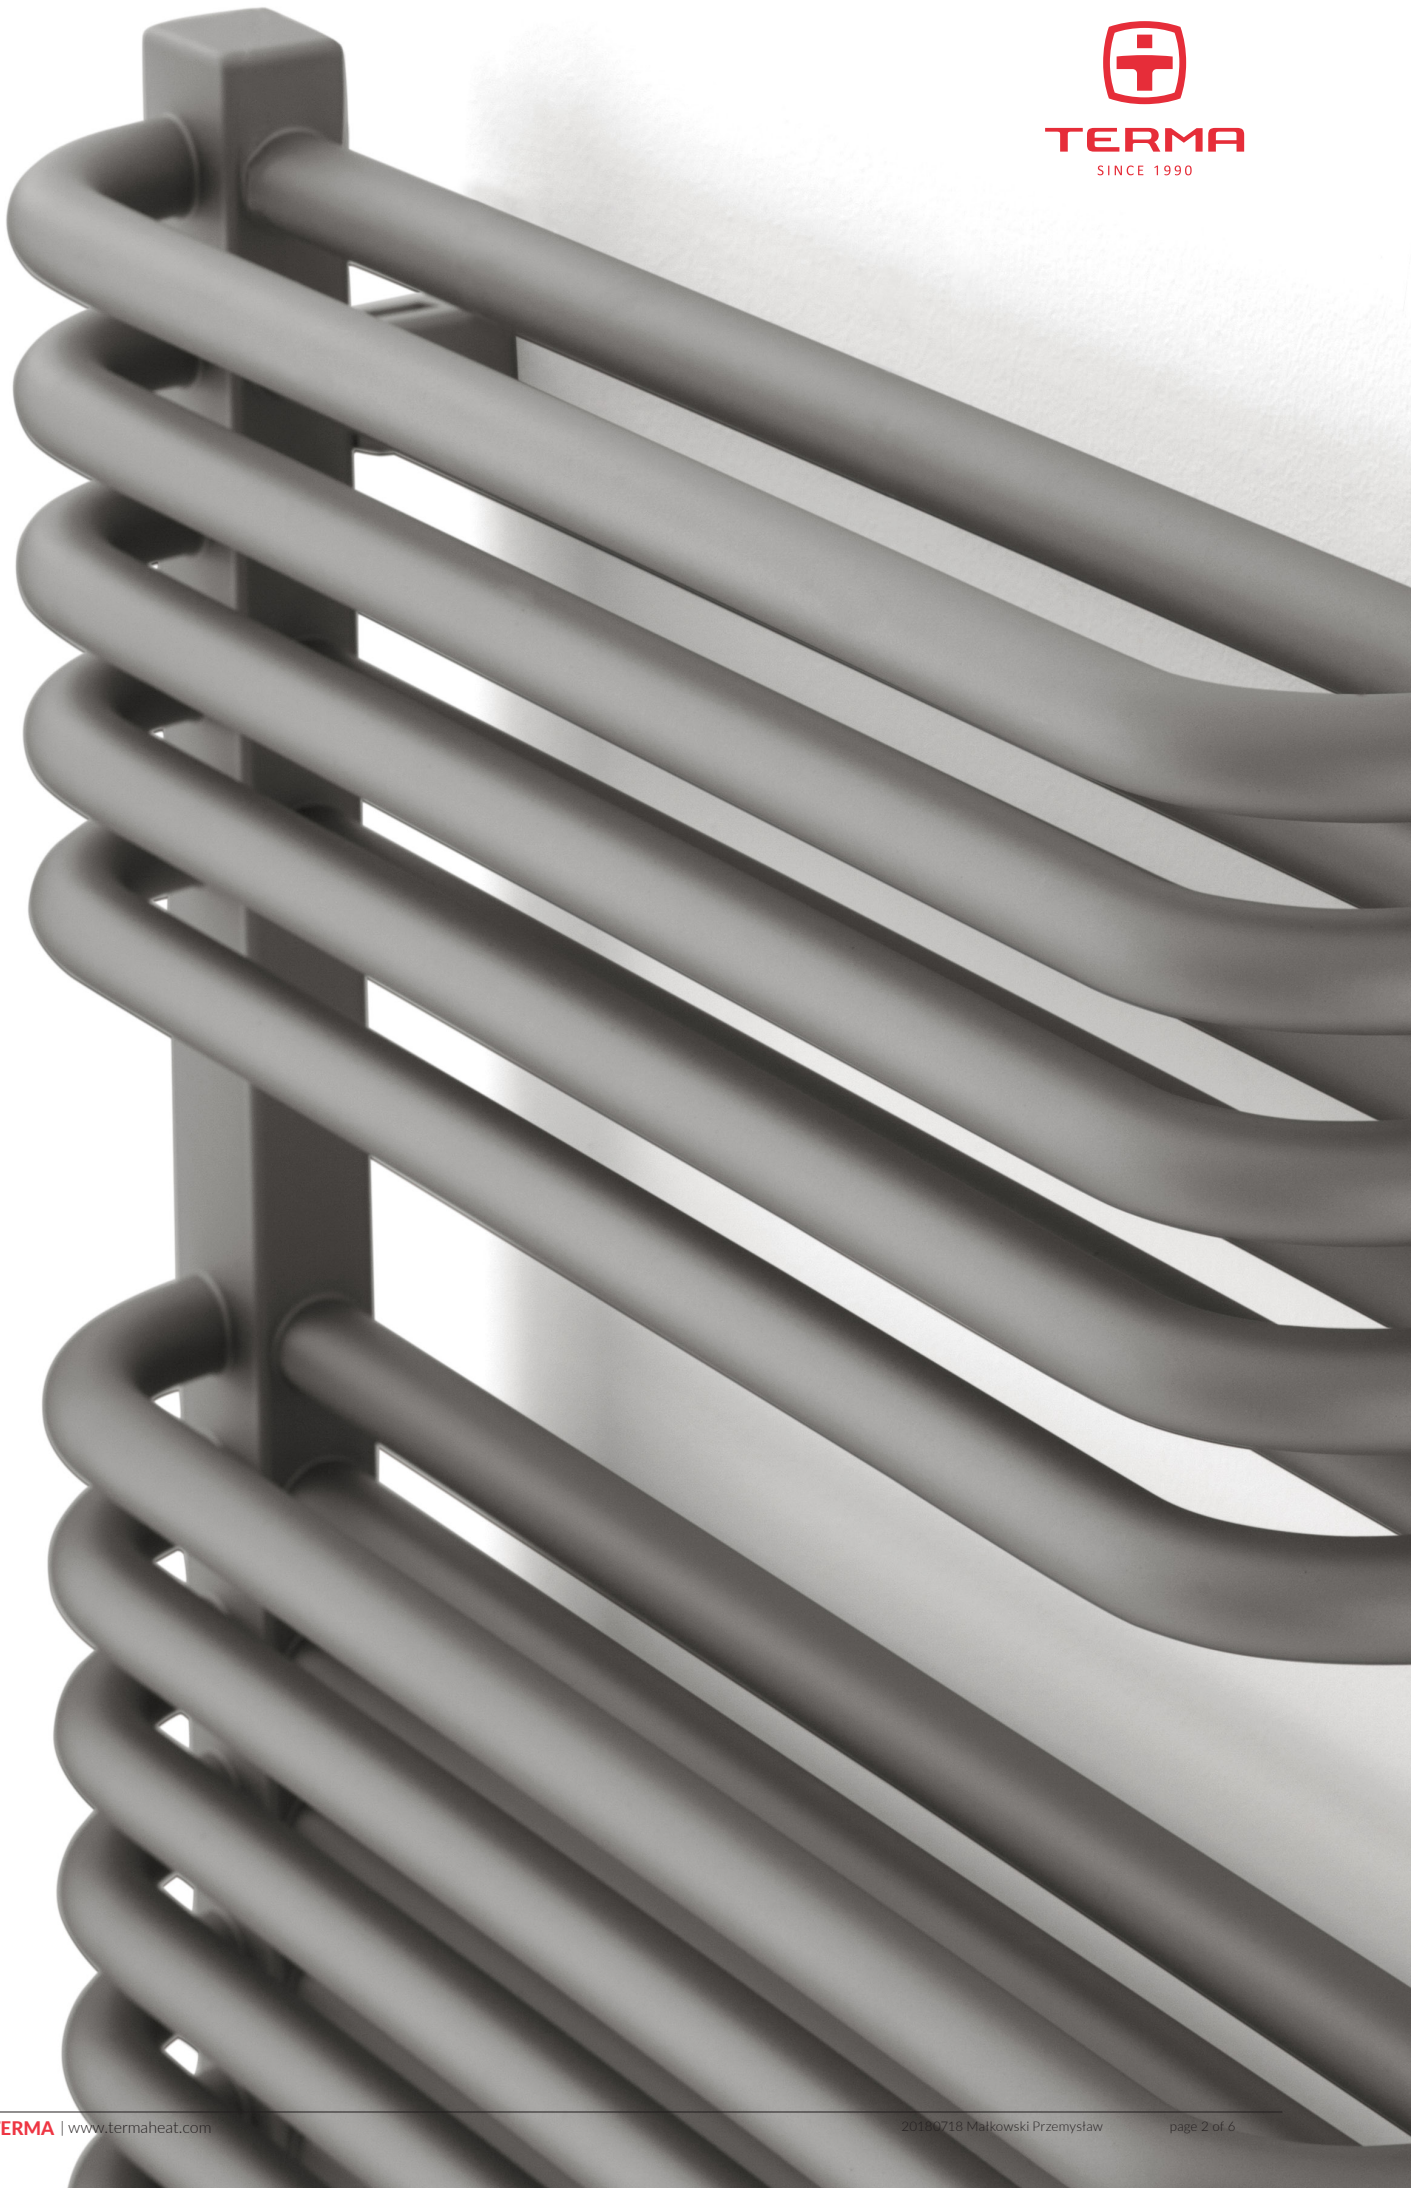





Standard connection:




Electric radiators:



Optional connection:

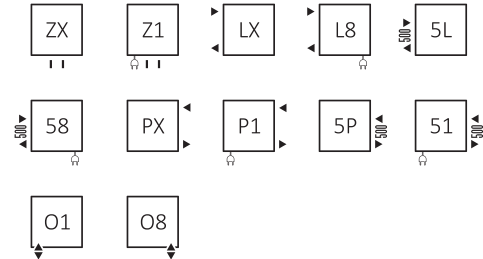

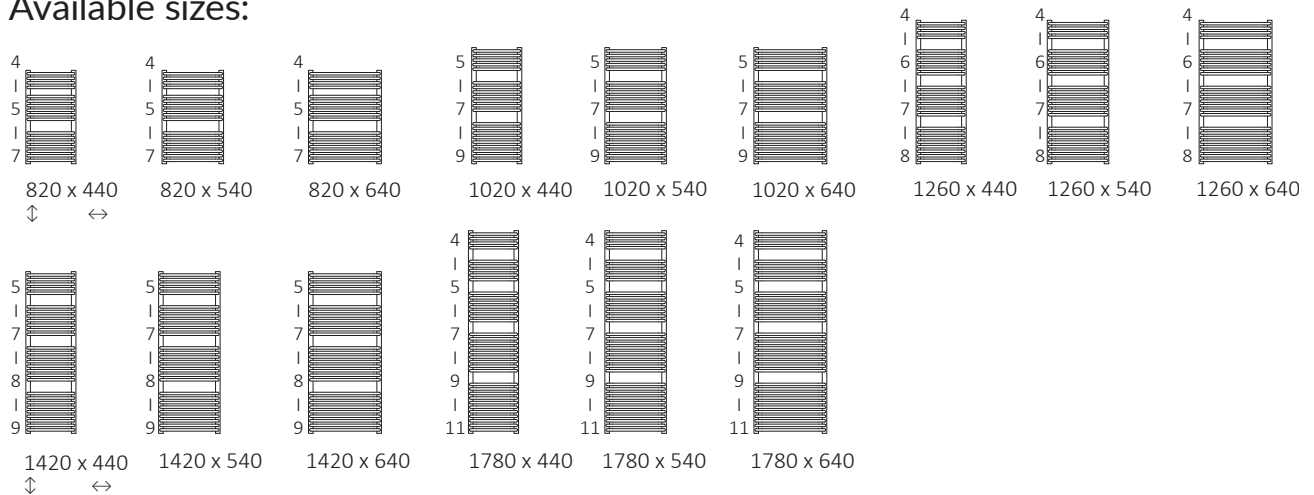


Available sizes:



Specification:


Working pressure: 800 kPa

Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product code <small>Configuration code p. 5</small>
820	440	50	400	533	288	600	400	640	90	5,44	12,15	WGTYT082044
820	540	50	500	645	348	600	500	640	90	6,39	14,29	WGTYT082054
820	640	50	600	755	407	800	600	640	90	7,35	16,43	WGTYT082064
1020	440	50	400	666	358	600	400	840	90	7,03	15,67	WGTYT102044
1020	540	50	500	806	433	800	500	840	90	8,29	18,47	WGTYT102054
1020	640	50	600	943	507	1000	600	840	90	9,54	21,28	WGTYT102064
1260	440	50	400	828	444	800	400	1080	90	8,46	18,82	WGTYT126044
1260	540	50	500	1002	537	1000	500	1080	90	9,95	22,16	WGTYT126054
1260	640	50	600	1173	628	1200	600	1080	90	11,44	25,50	WGTYT126064
1420	440	50	400	930	497	1000	400	1240	90	9,73	21,63	WGTYT142044
1420	540	50	500	1126	602	1200	500	1240	90	11,46	25,51	WGTYT142054
1420	640	50	600	1317	704	1200	600	1240	90	13,20	29,38	WGTYT142064
1780	440	50	400	1167	623	1200	400	1600	90	12,11	26,89	WGTYT178044
1780	540	50	500	1412	753	1500	500	1600	90	14,26	31,70	WGTYT178054
1780	640	50	600	1652	881	1500	600	1600	90	16,41	36,51	WGTYT178064





Technical drawing:

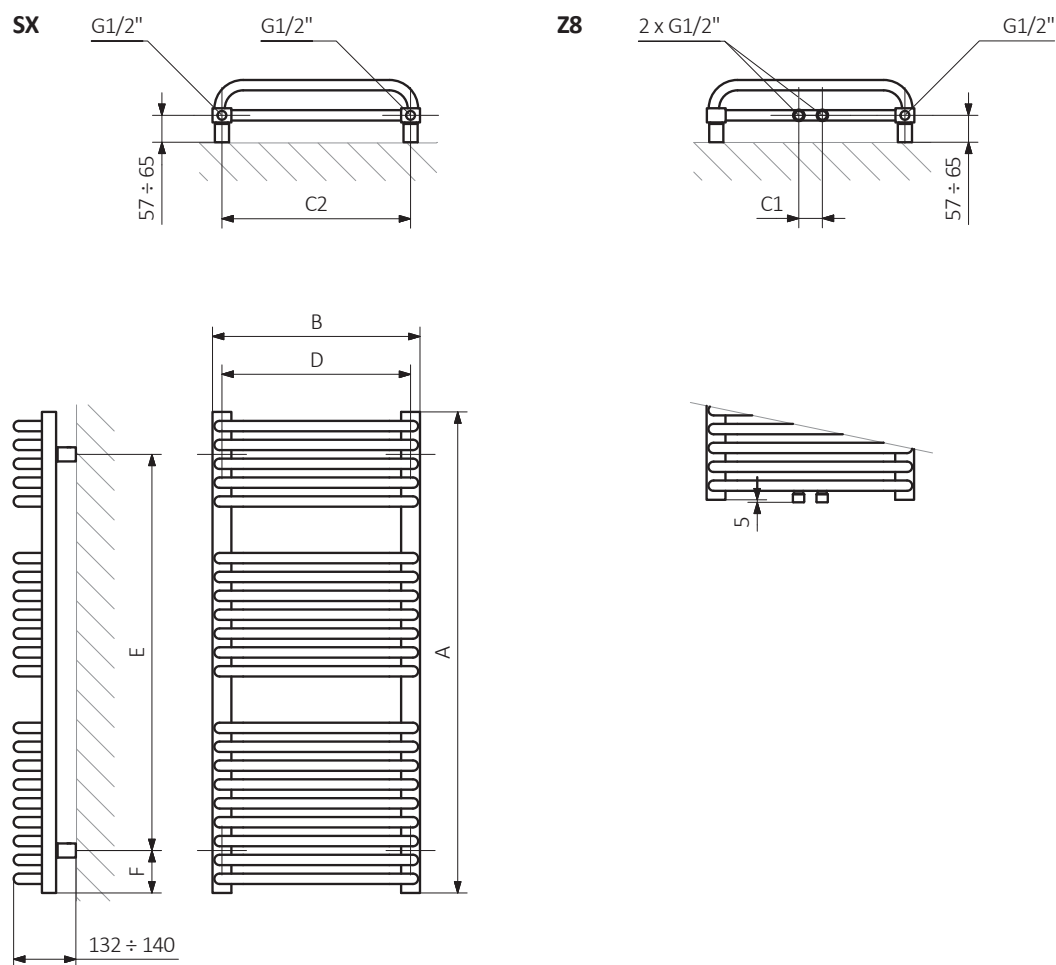

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector :

Pipe :





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGTYT082044

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 SX

Package code Colour code Connection code
K - carton box

Construction of electric heater configuration code:

WLTYT082044

PRODUCT CODE
(located in the table for the product)

K916E1DRYW

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 E1 DRY W

Package code Colour code Connection code Heating element code Type of heating element cable code
K - carton box

Epoxy primer

E – Code of epoxy primer is an extra processes.

WGTYT082044 K916SX **E** — Extra processes or additions code



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.