


Sherwood H




Sherwood H 330↓ × 1000↔ O1
colour: RAL 1014

Angled integrated thermostatic valve set with immersion tube, left, chrome
Integrated pipe-masking set, chrome
KUKA 50 hanger

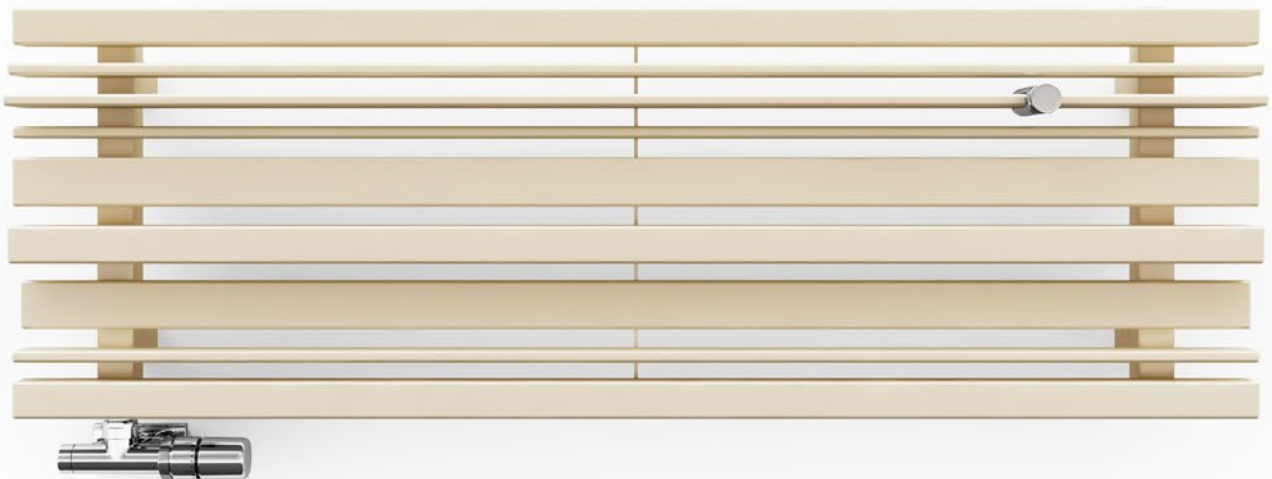












Standard connection:



Optional connection:



Available sizes:

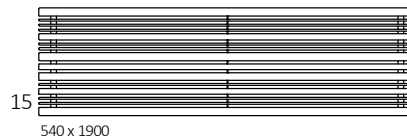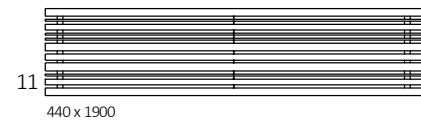

Specification:

Working pressure: 700 kPa Maximum operating temperature: 95°C


A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	H [dm³]	⚖️ [kg]	Product code <small>Configuration code p. 5</small>
330	1000	50	429	222	850	220	55	5,53	14,62	WGSTH033100
330	1300	50	558	289	1150	220	55	7,05	18,35	WGSTH033130
330	1600	50	687	356	1450	220	55	8,58	22,09	WGSTH033160
330	1900	50	816	422	1750	220	55	10,10	25,83	WGSTH033190
440	1300	50	701	364	1150	330	55	9,80	22,87	WGSTH044130
440	1600	50	863	448	1450	330	55	11,92	27,56	WGSTH044160
440	1900	50	1025	532	1750	330	55	14,05	32,24	WGSTH044190
540	1600	50	1057	557	1450	430	55	13,45	34,10	WGSTH054160
540	1900	50	1255	661	1750	430	55	15,84	39,96	WGSTH054190

Sherwood H







Technical drawing:

O8

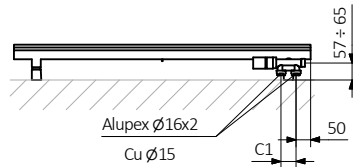

O1

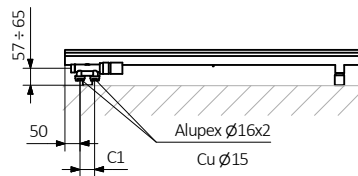

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:



In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a wate radiator product and configuration code:

WGSTH033100

PRODUCT CODE
(located in the table for the product)

K916O1

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K **916** **O1**

Package code

K - carton box

Colour code

Connection code

Epoxy primer

E - Code of epoxy primer is an extra processes.

WGSTH033100 K916O1 **E** — *Extra processes or additions code*



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.