

Dexter Pro



Dexter Pro 1220↓ × 600↔ Z8
colour: Soft 4006

2 x Angled lockshield valve, chrome
Noble thermostatic head, chrome
KTX 3 heating element, black



TERMA
SINCE 1990




Dexter Pro





Standard connection:

Optional connection:



Available sizes:

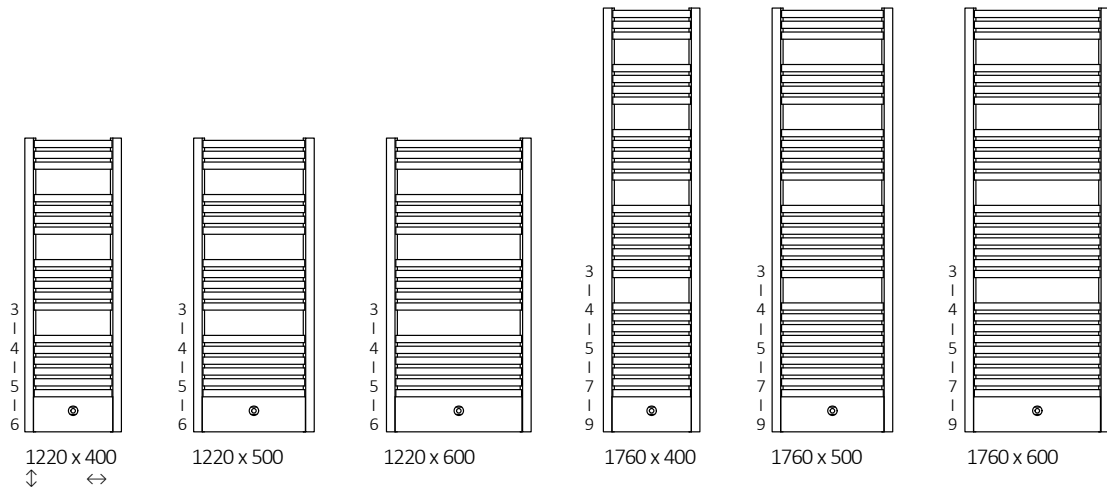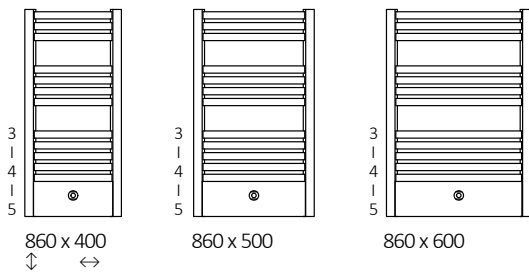

Specification:

Working pressure: 800 kPa Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	☺ [W]	D [mm]	E [mm]	F [mm]	H [dm³]	⚖️ [kg]	Product code <small>Configuration code p. 5</small>
860	400	50	357	327	173	300	350	680	90	2,64	7,68	WGDEP086040
860	500	50	457	408	216	400	450	680	90	8,93	8,93	WGDEP086050
860	600	50	557	488	259	600	550	680	90	10,17	10,17	WGDEP086060
1220	400	50	357	430	232	400	350	1040	90	10,60	10,60	WGDEP122040
1220	500	50	457	537	289	600	450	1040	90	12,38	12,38	WGDEP122050
1220	600	50	557	645	348	600	550	1040	90	14,15	14,15	WGDEP122060
1760	400	50	357	601	323	600	350	1580	90	15,27	15,27	WGDEP176040
1760	500	50	457	751	403	800	450	1580	90	17,94	17,94	WGDEP176050
1760	600	50	557	900	483	1000	550	1580	90	20,60	20,60	WGDEP176060



Dexter Pro



Technical drawing:

ZX



Z8

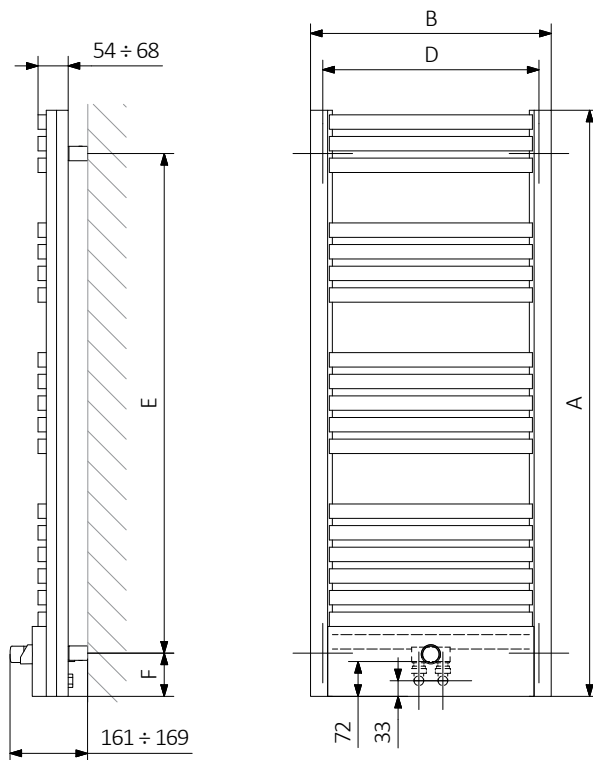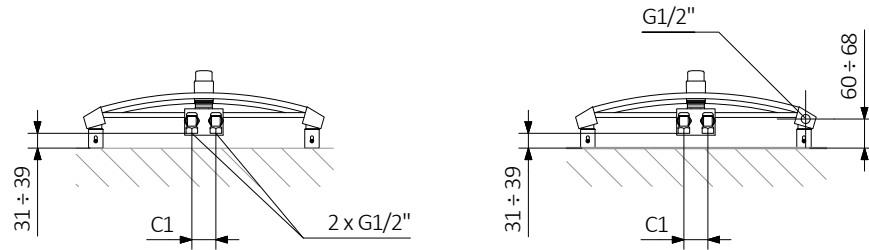

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGDEP086040

PRODUCT CODE
(located in the table for the product)

K916ZX

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K **916** **ZX**

Package code
K - carton box

Colour code

Connection code

Epoxy primer

E – Code of epoxy primer is an extra processes.

WGDEP086040 K916ZX **E** — *Extraprocesses or additions code*

Dexter Pro



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.