

Dexter One



Dexter One 1220↑ × 400↔ S1
colour: RAL 3020

Angled integrated thermostatic valve set with immersion tube, right, chrome
Integrated pipe-masking set, chrome
ONE heating element



TERMA
SINCE 1990




Dexter One




Design: Darek Berus, Daniel Dawidowski


Standard connections:



Electric radiators:



Available sizes:

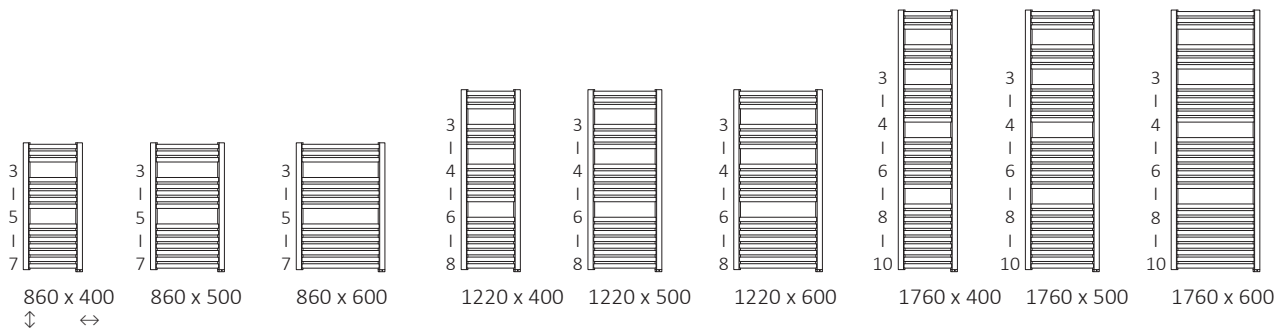

Dexter One



Electrical specification:

Power supply:	230 V / 50 Hz
Device protection class:	Class I
Ingress protection [IP]:	IPx5

Specifications:

Working pressure: 800 kPa Maximum operating temperature: 82°C

A ↓ [mm]	B ↔ [mm]	75/65/20°C [W]	55/45/20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code <small>configuration code p. 6</small>
Paint										
860	400	323	174	300	350	720	70	2,61	7,32	WZDEN086040
860	500	394	212	400	450	720	70	2,90	8,65	WZDEN086050
860	600	464	250	400	550	720	70	3,18	9,99	WZDEN086060
1220	400	440	237	400	350	1080	70	3,73	10,24	WZDEN122040
1220	500	541	291	600	450	1080	70	4,12	12,11	WZDEN122050
1220	600	640	344	600	550	1080	70	4,52	13,97	WZDEN122060
1760	400	618	332	600	350	1620	70	5,46	14,91	WZDEN176040
1760	500	762	409	800	450	1620	70	6,05	17,67	WZDEN176050
1760	600	906	487	1000	550	1620	70	6,63	20,42	WZDEN176060
Plating										
860	400	225	117	200	350	720	70	2,61	7,07	WZDEN086040
860	500	281	147	300	450	720	70	2,90	8,35	WZDEN086050
860	600	337	176	400	550	720	70	3,18	9,64	WZDEN086060
1220	400	298	155	300	350	1080	70	3,73	9,89	WZDEN122040
1220	500	373	194	400	450	1080	70	4,12	11,69	WZDEN122050
1220	600	448	233	400	550	1080	70	4,52	13,49	WZDEN122060
1760	400	421	218	400	350	1620	70	5,46	14,40	WZDEN176040
1760	500	526	273	600	450	1620	70	6,05	17,05	WZDEN176050
1760	600	631	327	600	550	1620	70	6,63	19,71	WZDEN176060



Dexter One




Technical drawing:

S8

S1

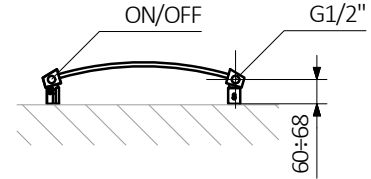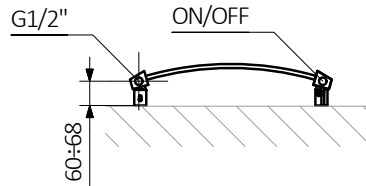


100÷108 (B=400)
107÷115 (B=500)
114÷122 (B=600)

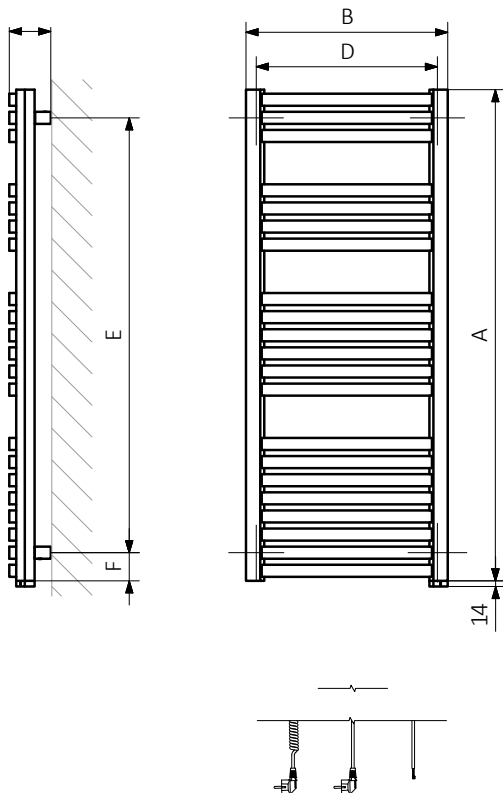

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:

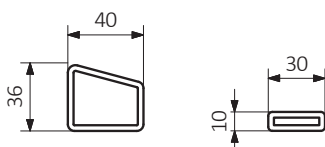



In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a configuration code of a water radiator with a built-in One heating element:

WZDEN086040

PRODUCT CODE
(located in the table for the product)

K916S1

CONIGURATION CODE
(supplemented by hand)

Cable Type

W – straight cable with plug
P – straight cable without plug
U – spiral cable with plug

Example Configuration

K 916 S1 P

Package code Plate color code Connection code Cable Type code

K - carton box

The Construction of the product and configuration code for a radiator with the built-in heating element ONE:

WWDEN086040

PRODUCT CODE
(located in the table for the product)

K916E1

CONIGURATION CODE
(supplemented by hand)

Cable Type

W – straight cable with plug
P – straight cable without plug
U – spiral cable with plug

Example Configuration

K 916 E1 P

Package code Plate color code Connection code Cable Type code

K - carton box

Epoxy primer

E – Code of epoxy primer is an extra processes.

WZDEN086040 K916S1 **E** — Extra processes or additions code

Dexter One



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.