

Dexter



Dexter 1220↓ × 600↔ SX
colour: RAL 3020

3-axis thermostatic valve set, left, chrome
Pipe-masking set, chrome




TERMA

SINCE 1990







Standard connection:




Electric radiators:



Optional connection:



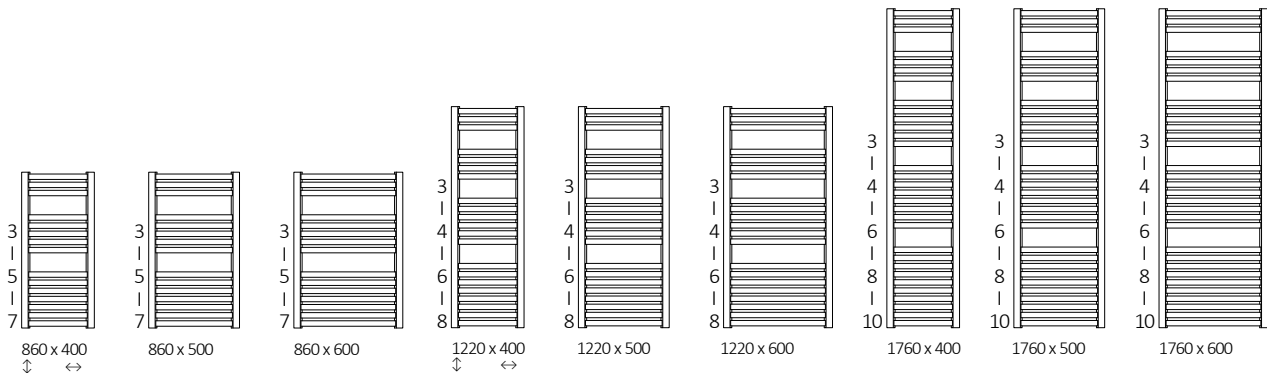


Available sizes:




Specification:

Working pressure: 800 kPa Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm²]	 [kg]	Product code <small>Configuration code p. 5</small>
Paint												
860	400	50	357	323	174	300	350	680	90	2,70	7,32	WGDEX086040
860	500	50	457	394	212	400	450	680	90	2,99	8,65	WGDEX086050
860	600	50	557	464	250	400	550	680	90	3,27	9,99	WGDEX086060
1220	400	50	357	440	237	400	350	1040	90	3,82	10,24	WGDEX122040
1220	500	50	457	541	291	600	450	1040	90	4,21	12,11	WGDEX122050
1220	600	50	557	640	344	600	550	1040	90	4,61	13,97	WGDEX122060
1760	400	50	357	618	332	600	350	1580	90	5,55	14,91	WGDEX176040
1760	500	50	457	762	409	800	450	1580	90	6,14	17,67	WGDEX176050
1760	600	50	557	906	487	1000	550	1580	90	6,72	20,42	WGDEX176060
Plating												
860	400	50	357	225	117	200	350	680	90	2,70	7,07	WGDEX086040
860	500	50	457	281	147	300	450	680	90	2,99	8,35	WGDEX086050
860	600	50	557	337	176	400	550	680	90	3,27	9,64	WGDEX086060
1220	400	50	357	298	155	300	350	1040	90	3,82	9,89	WGDEX122040
1220	500	50	457	373	194	400	450	1040	90	4,21	11,69	WGDEX122050
1220	600	50	557	448	233	400	550	1040	90	4,61	13,49	WGDEX122060
1760	400	50	357	421	218	400	350	1580	90	5,55	14,40	WGDEX176040
1760	500	50	457	526	273	600	450	1580	90	6,14	17,05	WGDEX176050
1760	600	50	557	631	327	600	550	1580	90	6,72	19,71	WGDEX176060




Technical drawing:

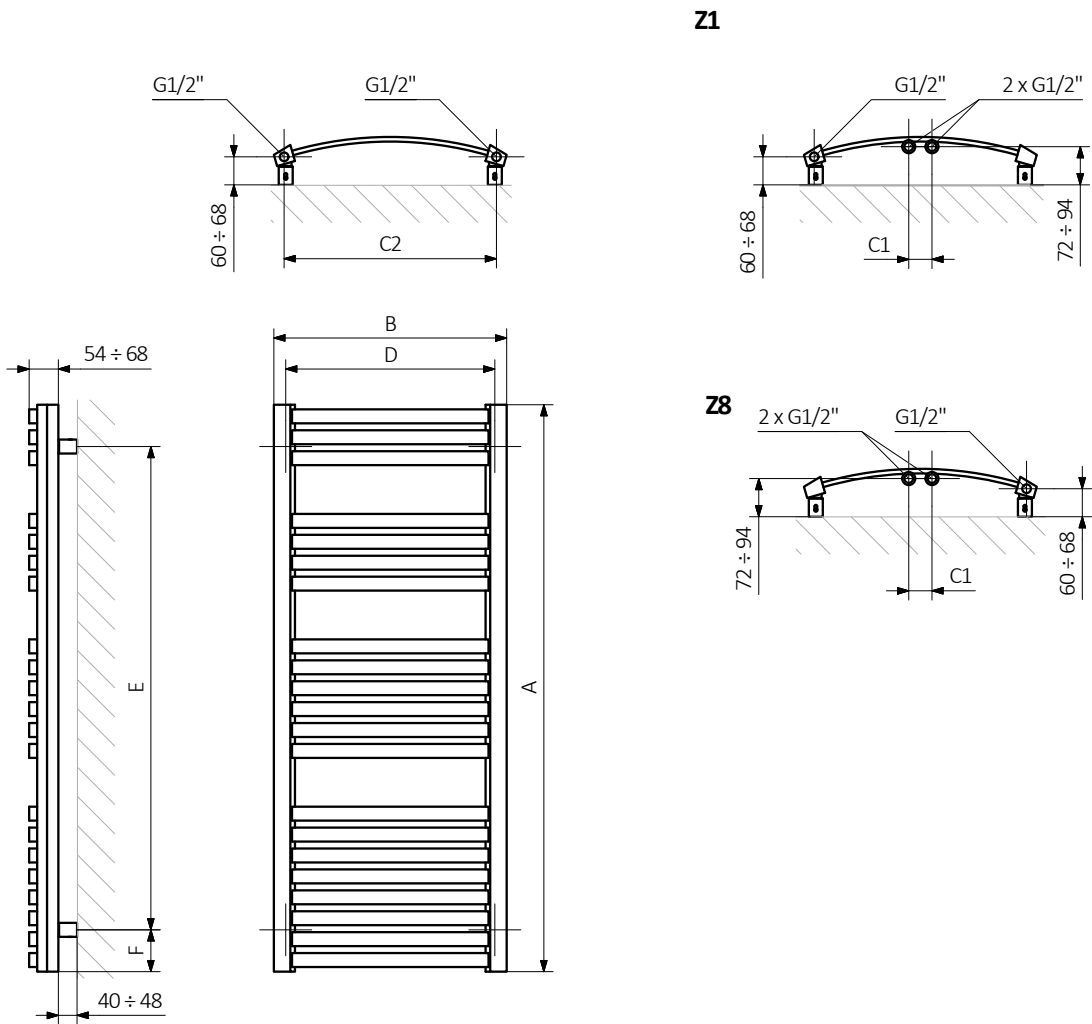

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
 E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector: **Pipe:**





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGDEX086040

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 SX

Package code Colour code Connection code
K - carton box

Construction of electric heater configuration code:

WLDEX086040

K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 E1 DRY M

Package code Colour code Connection code Heating element code Type of heating element cable code
K - carton box

Epoxy primer

E – Code of epoxy primer is an extra processes.

WGDEX086040 K916SX **E** — *Extraprocesses or additions code*



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.