


POC 2



POC 2 1400 \downarrow × 600 \leftrightarrow SX
colour: RAL 3020

3-axis thermostatic valve set, left, chrome
Pipe-masking set, chrome

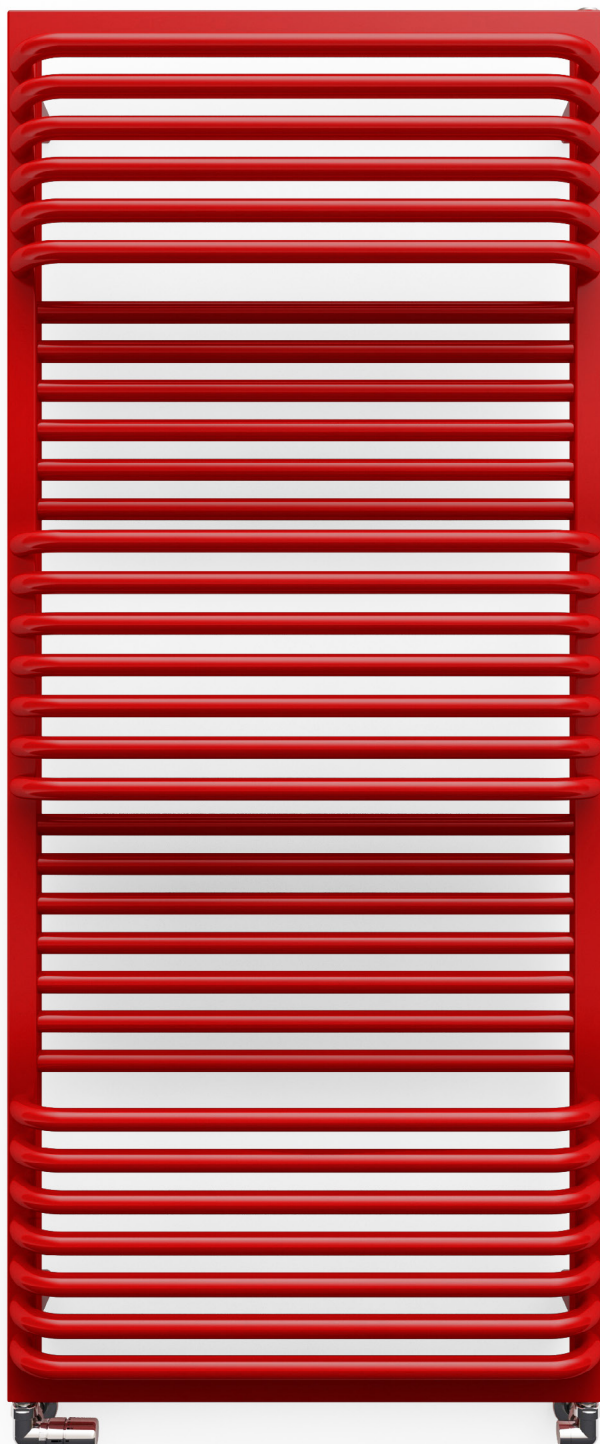


TERMA
SINCE 1999




POC 2




Standard connection:



Electric radiators:



Optional connection:

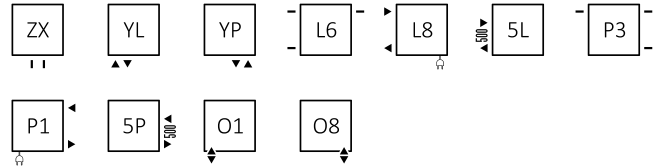

Specification:



















Working pressure: 1000 kPa Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	C5 [mm]	75/65/20°C [W]	55/45/20°C [W]	⊙ [W]	D [mm]	E [mm]	F [mm]	⊔ [dm ²]	⊔ [kg]	Product code <small>Configuration code p. 7</small>
600	450	50	420	500	308	167	300	420	420	90	3,19	6,48	WGZUL060045
600	500	50	470	500	342	185	400	470	420	90	3,45	7,05	WGZUL060050
600	600	50	570	500	410	222	400	570	420	90	3,99	8,19	WGZUL060060
840	450	50	420	500	443	239	400	420	660	90	4,29	8,76	WGZUL084045
840	500	50	470	500	493	266	600	470	660	90	4,64	9,53	WGZUL084050
840	600	50	570	500	590	318	600	570	660	90	5,36	11,07	WGZUL084060
840	700	50	670	500	690	372	800	670	660	90	6,07	12,60	WGZUL084070
1040	450	50	420	500	556	299	600	420	860	90	5,26	10,80	WGZUL104045
1040	500	50	470	500	618	332	600	470	860	90	5,70	11,73	WGZUL104050
1040	600	50	570	500	743	399	800	570	860	90	6,56	13,61	WGZUL104060
1040	700	50	670	500	866	465	800	670	860	90	7,42	15,48	WGZUL104070
1240	450	50	420	500	669	359	800	420	1060	90	6,19	12,72	WGZUL124045
1240	500	50	470	500	744	399	800	470	1060	90	6,70	13,82	WGZUL124050
1240	600	50	570	500	893	479	1000	570	1060	90	7,71	16,03	WGZUL124060
1240	700	50	670	500	1041	559	1000	670	1060	90	8,72	18,23	WGZUL124070
1400	500	50	470	500	844	452	800	470	1220	90	7,53	15,57	WGZUL140050
1400	600	50	570	500	1013	543	1000	570	1220	90	8,66	18,05	WGZUL140060
1400	700	50	670	500	1182	633	1200	670	1220	90	9,79	20,52	WGZUL140070

POC 2




Available sizes:








Technical drawing:

SX

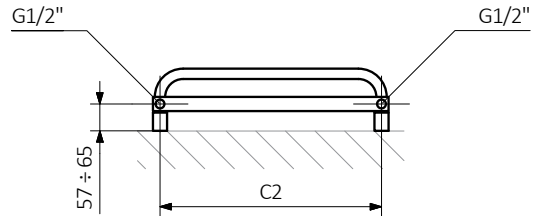



51

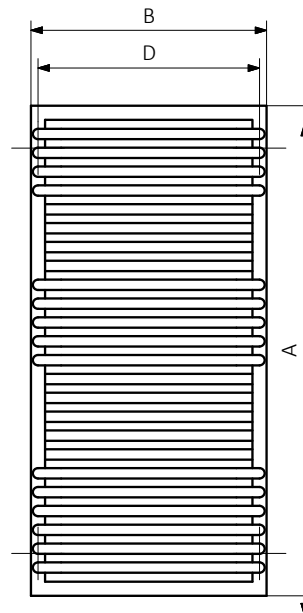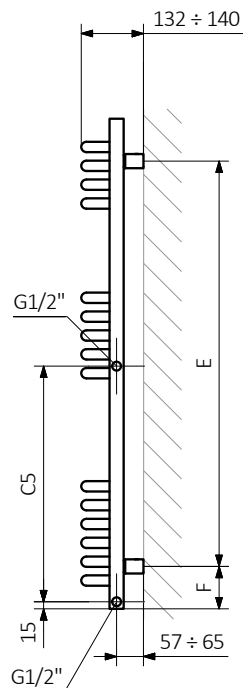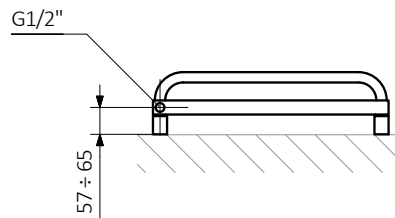

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:

Pipe:






Technical drawing:

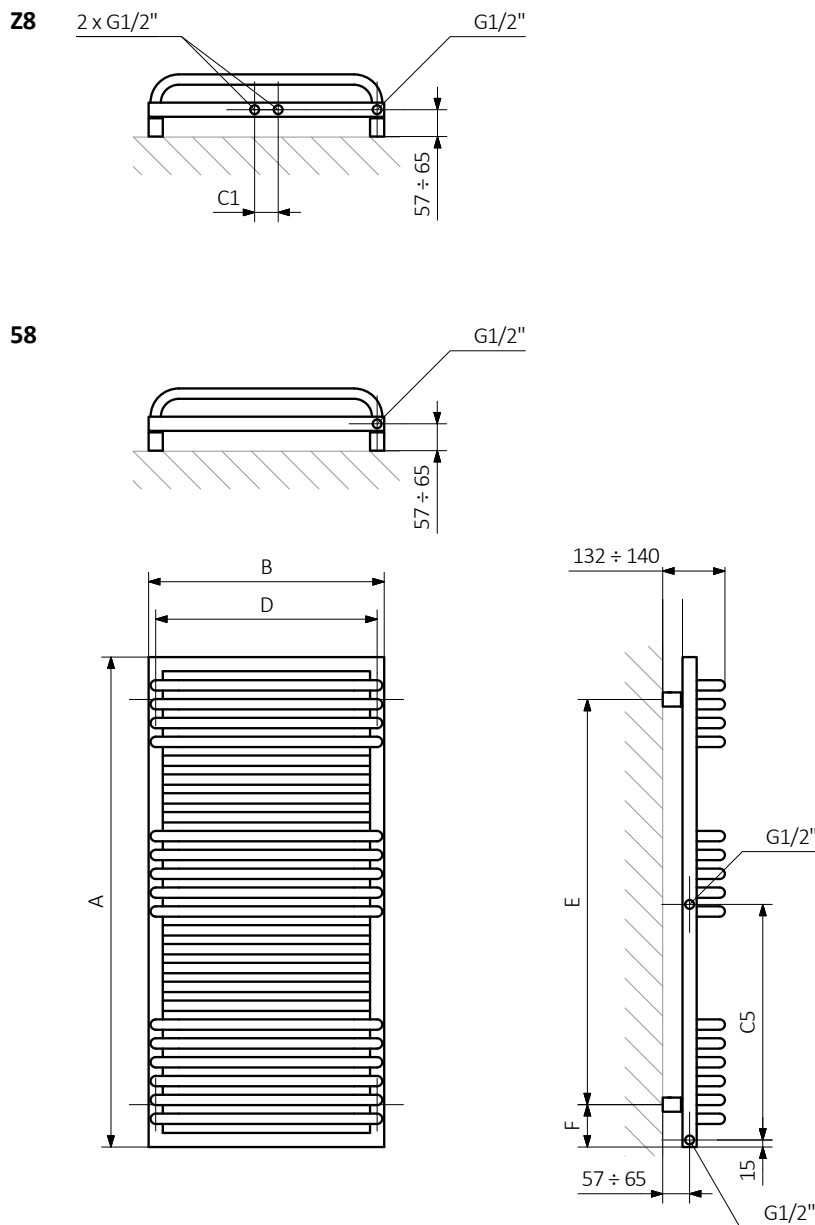

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
 E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector: **Pipe:**

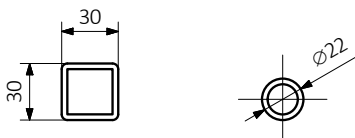



In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:


WGZUL060045

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

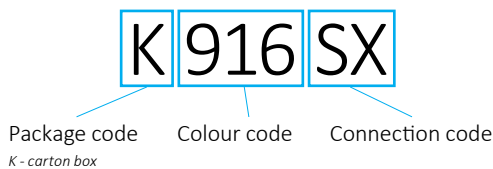

Construction of electric heater configuration code:


WLZUL060045

K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

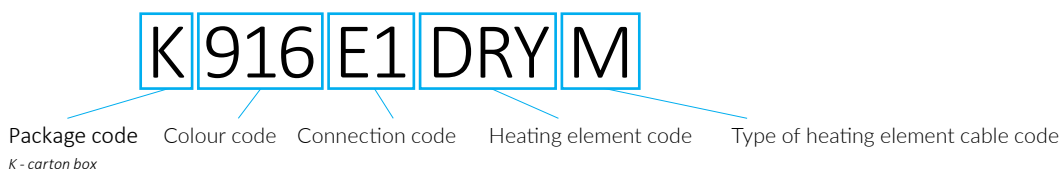

Epoxy primer

E – Code of epoxy primer is an extra processes.

WGZUL060045 K916SX **E** — Extra processes or additions code

POC 2



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.