


DXQU 0805 0600...



DXQU 1255 0600...

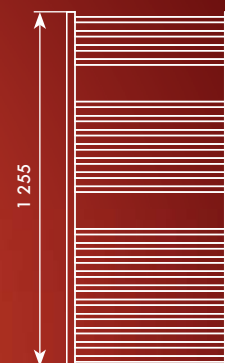

DXQU 1755 0600...



Material	stainless steel profiles 30×30 mm stainless steel profiles 20×20 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	95 °C
Number of profiles	12, 21, 29
Surface treatment	brushed stainless steel

Height [mm]	Length [mm]	Depth [mm]	Connection span [mm]	Weight [kg]	Water capacity [l]	Heating Output [W] 75/65/20 °C	Recommended power input stainless steel [W]
805	600	30	570	10,2	2,9	288	300
1 255	600	30	570	15,4	4,5	436	400
1 755	600	30	570	23,3	6,2	604	500

Connection fittings are not part of the radiator.

Thermal power measuring follows in accordance with EN442.