

QUADRAT PLUS



QUADRAT PLUS


Material	steel profiles 40 × 40 mm / steel profiles horizontal 25 × 25 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	18, 26





QUADRAT PLUS 1245 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1245/600	40	15,2	9,7	1,271	699	568	365	-	-	mc 50
1745/600	40	20,8	13,2	1,254	965	787	508	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.
Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

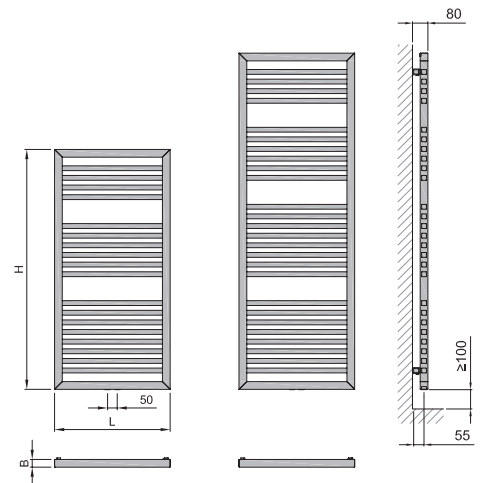

DQUP 1245 0600...

DQUP 1745 0600...