



Max. working pressure/  
Presiune max. de lucru 10 bar



Max. working temperature/  
Temperatură max. de lucru 90 °C



Mounting kit included/  
Kit montaj inclus: K03



Factory pressure test/  
Presiune de probă: 13 bar



Elements & collectors/  
Elemente și colectori: Ø89+40x30mm



NEW/NOU

# Aramis 2



ARAMIS 2 is a sleek and modern heating solution that adds both style and functionality to any room. Its large horizontal tubes are open at both ends, providing ample space for towels to be warmed, while providing efficient heat distribution.

ARAMIS 2 este o soluție de încălzire elegantă și modernă, care adăuga stil și funcționalitate oricărei încăperi. Tuburile orizontale mari sunt deschise la ambele capete, oferind spațiu amplu pentru încălzirea prosoapelor, oferind în același timp o distribuție eficientă a căldurii.

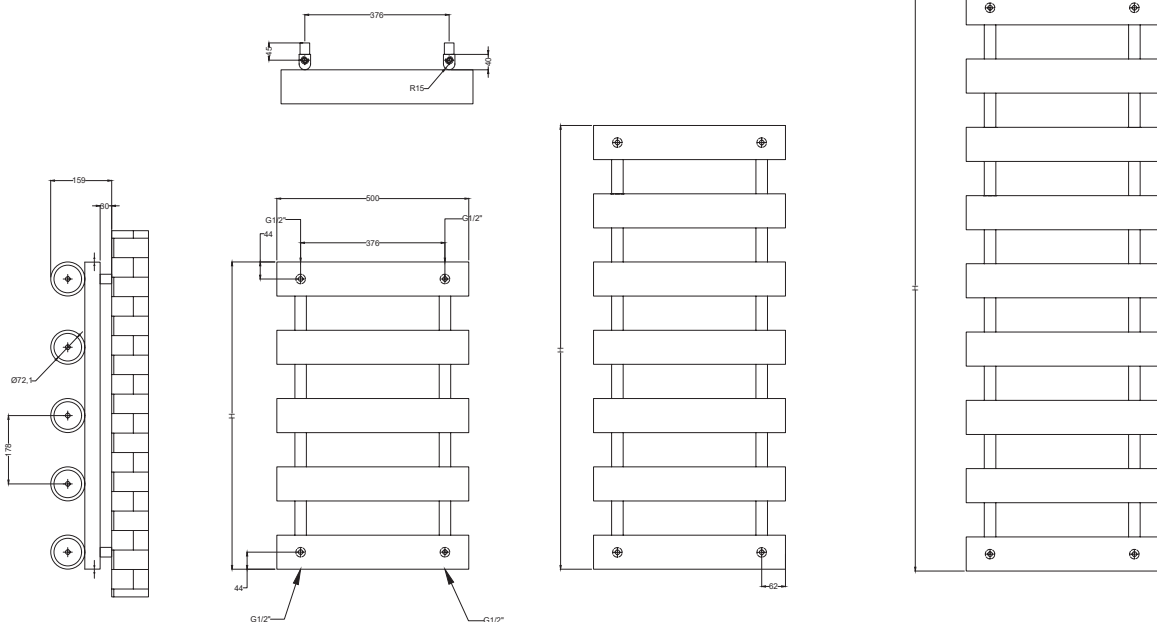

Hydraulic connections/Conexiuni hidraulice

Code Cod	Finish Finisaj	Height Înălțime (H) mm	Length Lățime (L) mm	Centres Interax (A) mm	No el Nr ele- menți pcs	Weight Greutate kg	Volume Volum l	Output / Putere termică (watt)			
								Δt=30°C W	Δt=50°C W	Δt=60°C W	electric*** W
AR2050/080V9010	RAL9010 white/alb	800	500	376	5	21,3	5,2	380	731	914	900
AR2050/115.5V9010		1155	500	376	7	30	7,4	534	1027	1284	900
AR2050/151.2V9010		1512	500	376	9	38,6	9,5	688	1323	1654	1200

\*\*\*\*\* The mentioned code is for hydronic version./Codul menționat este pentru versiunea hidraulică.