



Mike

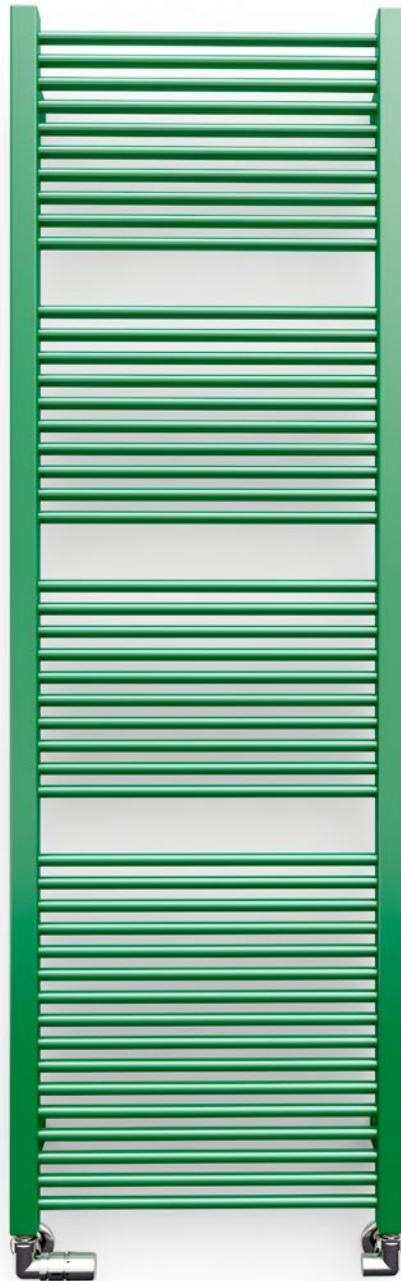


Mike 1335↓ × 530↔ SX
colour: RAL 6029

3-axis thermostatic valve set, left, chrome
Pipe-masking set, chrome



TERMA
SINCE 1990






Standard connection:

A \updownarrow 435÷1635, B \leftrightarrow 230÷530:




Electric radiators:




Optional connection:


A \updownarrow 435÷1635, B \leftrightarrow 230÷530:



A \updownarrow 435÷1635, B \leftrightarrow 430÷530:






A \updownarrow 735÷1635, B \leftrightarrow 230÷530:






Specification:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

| A \updownarrow [mm] | B \leftrightarrow [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] |  [dm³] |  [kg] | Product code <small>Configuration code p. 7</small> |
|--------------------------|-----------------------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|--|---|--|
| Paint | | | | | | | | | | | |
| 435 | 430 | 400 | 203 | 106 | 200 | 400 | 255 | 90 | 1,25 | 3,62 | WGMIK043043 |
| 435 | 530 | 500 | 245 | 128 | 300 | 500 | 255 | 90 | 1,41 | 4,28 | WGMIK043053 |
| 460 | 230 | 200 | 122 | 64 | 120 | 200 | 280 | 90 | 0,92 | 2,24 | WGMIK046023 |
| 710 | 230 | 200 | 185 | 97 | 200 | 200 | 530 | 90 | 1,40 | 3,38 | WGMIK071023 |
| 735 | 430 | 400 | 337 | 176 | 400 | 400 | 555 | 90 | 2,07 | 5,92 | WGMIK073043 |
| 735 | 530 | 500 | 406 | 213 | 400 | 500 | 555 | 90 | 2,34 | 6,99 | WGMIK073053 |
| 960 | 230 | 200 | 247 | 130 | 300 | 200 | 780 | 90 | 1,89 | 4,52 | WGMIK096023 |
| 1035 | 430 | 400 | 466 | 245 | 400 | 400 | 855 | 90 | 2,89 | 8,21 | WGMIK103043 |
| 1035 | 530 | 500 | 563 | 295 | 600 | 500 | 855 | 90 | 3,26 | 9,69 | WGMIK103053 |
| 1210 | 230 | 200 | 308 | 162 | 300 | 200 | 1030 | 90 | 2,38 | 5,66 | WGMIK121023 |
| 1335 | 430 | 400 | 593 | 312 | 600 | 400 | 1155 | 90 | 3,71 | 10,51 | WGMIK133043 |
| 1335 | 530 | 500 | 715 | 376 | 800 | 500 | 1155 | 90 | 4,19 | 12,40 | WGMIK133053 |
| 1460 | 230 | 200 | 367 | 193 | 400 | 200 | 1280 | 90 | 2,86 | 6,80 | WGMIK146023 |
| 1635 | 430 | 400 | 716 | 377 | 800 | 400 | 1455 | 90 | 4,53 | 12,81 | WGMIK163043 |
| 1635 | 530 | 500 | 864 | 454 | 800 | 500 | 1455 | 90 | 5,11 | 15,11 | WGMIK163053 |
| 1710 | 230 | 200 | 425 | 224 | 400 | 200 | 1530 | 90 | 3,35 | 7,94 | WGMIK171023 |




 colour included in the price


| A ↓ [mm] | B ↔ [mm] | C2 [mm] | 75/65/20°C [W] | 55/45/20°C [W] |  [W] | D [mm] | E [mm] | F [mm] | H [dm ²] |  [kg] | Product code <small>Configuration code p. 7</small> |
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|-------------------------|---|--|
|-------------|-------------|------------|-------------------|-------------------|--|-----------|-----------|-----------|-------------------------|---|--|


Plating

| | | | | | | | | | | | |
|------|-----|-----|-----|-----|-----|-----|------|----|------|-------|-------------|
| 435 | 430 | 400 | 142 | 72 | 120 | 400 | 255 | 90 | 1,25 | 3,48 | WGMIK043043 |
| 435 | 530 | 500 | 171 | 87 | 200 | 500 | 255 | 90 | 1,41 | 4,11 | WGMIK043053 |
| 460 | 230 | 200 | 85 | 44 | 120 | 200 | 280 | 90 | 0,92 | 2,16 | WGMIK046023 |
| 710 | 230 | 200 | 130 | 66 | 120 | 200 | 530 | 90 | 1,40 | 3,25 | WGMIK071023 |
| 735 | 430 | 400 | 236 | 120 | 200 | 400 | 555 | 90 | 2,07 | 5,68 | WGMIK073043 |
| 735 | 530 | 500 | 284 | 145 | 300 | 500 | 555 | 90 | 2,34 | 6,71 | WGMIK073053 |
| 960 | 230 | 200 | 173 | 88 | 200 | 200 | 780 | 90 | 1,89 | 4,35 | WGMIK096023 |
| 1035 | 430 | 400 | 326 | 167 | 300 | 400 | 855 | 90 | 2,89 | 7,89 | WGMIK103043 |
| 1035 | 530 | 500 | 394 | 201 | 400 | 500 | 855 | 90 | 3,26 | 9,31 | WGMIK103053 |
| 1210 | 230 | 200 | 216 | 110 | 200 | 200 | 1030 | 90 | 2,38 | 5,45 | WGMIK121023 |
| 1335 | 430 | 400 | 415 | 212 | 400 | 400 | 1155 | 90 | 3,71 | 10,09 | WGMIK133043 |
| 1335 | 530 | 500 | 501 | 255 | 600 | 500 | 1155 | 90 | 4,19 | 11,90 | WGMIK133053 |
| 1460 | 230 | 200 | 257 | 131 | 300 | 200 | 1280 | 90 | 2,86 | 6,54 | WGMIK146023 |
| 1635 | 430 | 400 | 501 | 256 | 600 | 400 | 1455 | 90 | 4,53 | 12,30 | WGMIK163043 |
| 1635 | 530 | 500 | 605 | 308 | 600 | 500 | 1455 | 90 | 5,11 | 14,50 | WGMIK163053 |
| 1710 | 230 | 200 | 298 | 152 | 300 | 200 | 1530 | 90 | 3,35 | 7,64 | WGMIK171023 |




Available sizes:

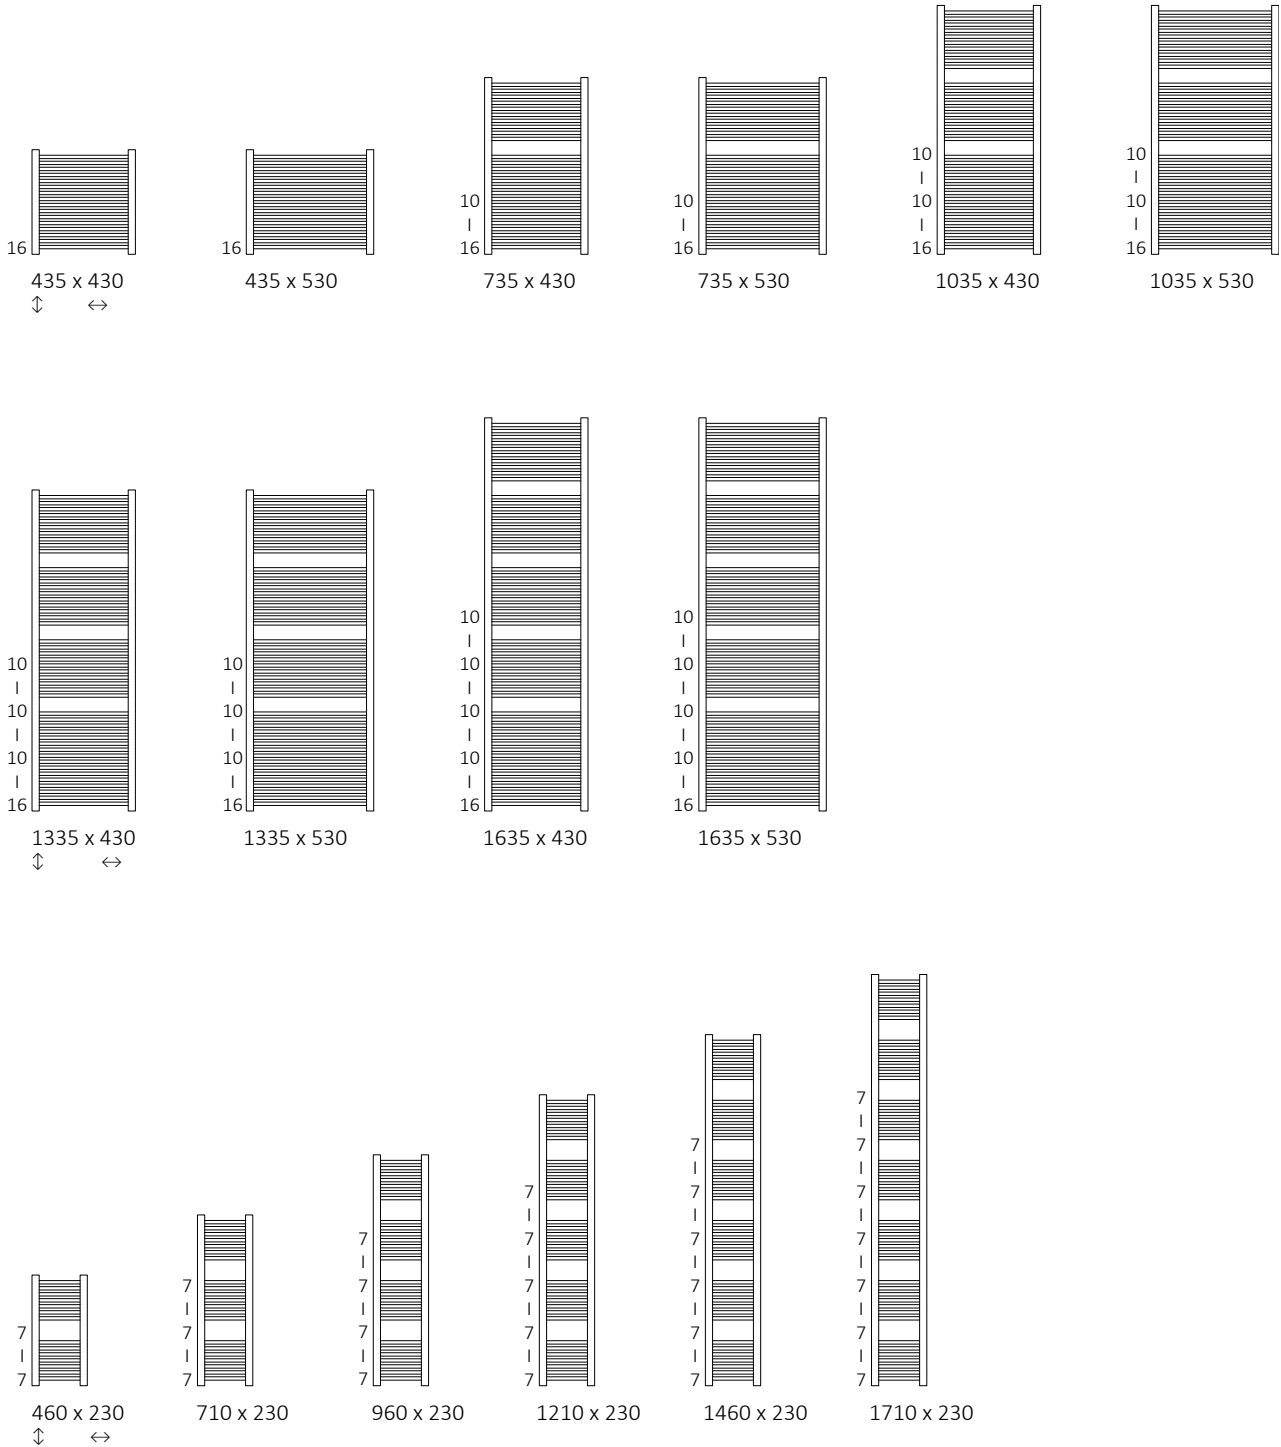





Technical drawing:

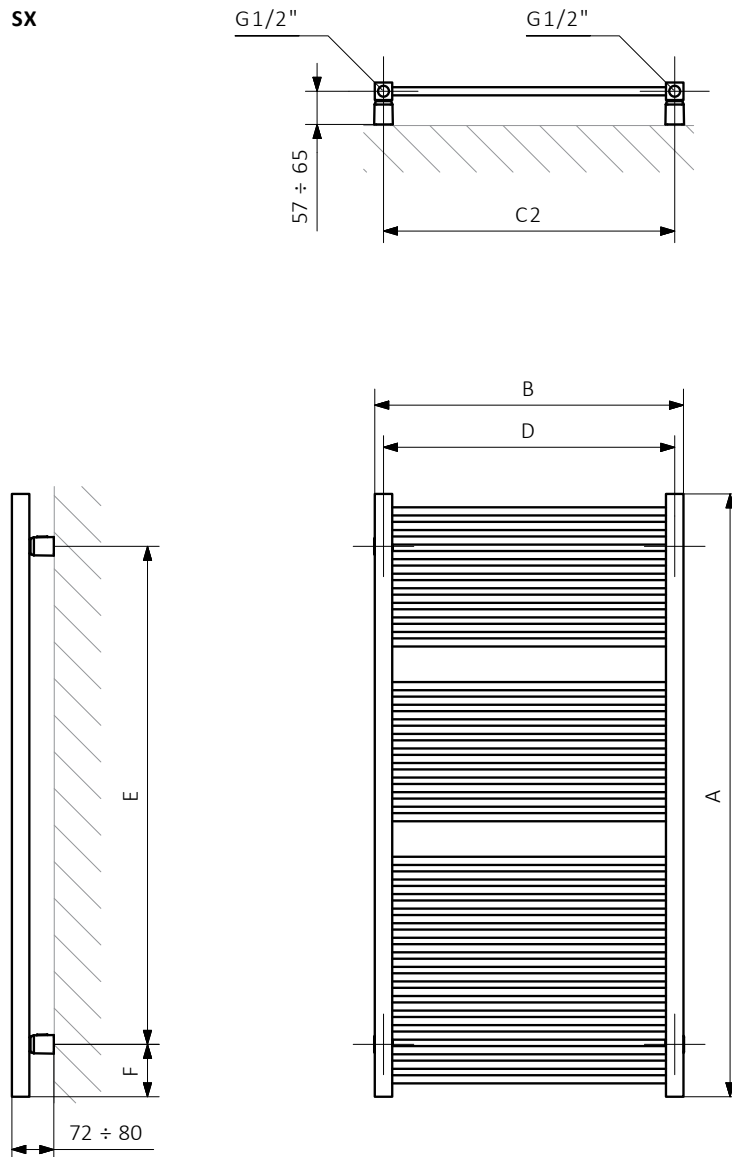

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector : Pipe :





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGMIK043043

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 SX

Package code
K - carton box

Colour code

Connection code

Construction of electric heater configuration code:

WLMIK043043

K916E1DRYW

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 E1 DRY W

Package code
K - carton box

Colour code

Connection code


Heating element code

Type of heating element cable code

Epoxy primer

E - Code of epoxy primer is an extra processes.

WGMIK043043 K916SX **E** — Extra processes or additions code



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.